


PEROXAN HX-50 W

Dialkyl peroxide / Polymerization

Description

2,5-Dimethyl-2,5-di-(tert-butylperoxy)-hexane
50%, Solution in white oil

PEROXAN HX-50 W is used for the production of controlled rheology polypropylene (CR-PP).

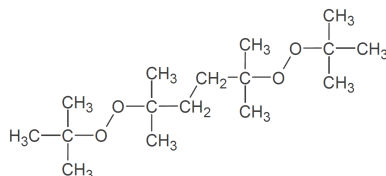

Molecular weight:

290.4

CAS No.:

78-63-7

Technical data

Appearance:

clear liquid

Peroxide assay:

appx. 50%

Active oxygen assay:

appx. 5.51%

Density at 20°C:

0.87 g/cm³

Half life time

in chlorobenzene:

t _{1/2}	10h	1h	1min
bei	115°C	134°C	174°C

Storage

Maximum storage temperature (Ts max):

40°C

Minimum storage temperature (Ts min):

5°C

Storage stability as from date of delivery:

6 months

Hazardous reactions

Organic Peroxides are more or less stable products but will decompose under the influence of heat. To minimize a loss of quality during storage, it is important that the recommended maximum storage temperature is not exceeded. If a minimum storage temperature is given, an undesirable process such as a solidification or phase separation, is known to occur below this temperature.

Safety characteristics

SADT:

80°C

SADT in IBC:

80°C

The SADT (Self Accelerating Decomposition Temperature) is the lowest temperature at which a self accelerating decomposition may occur.

PEROXAN HX-50 W

Dialkyl peroxide / Polymerization

Application

Controlled rheology polypropylene (CR-PP) in an extrusion process:
PEROXAN HX-50 W allows great flexibility in controlling the melt flow index (MFI) of polypropylene. Small changes in either peroxide concentration or process temperature can produce significantly different MFIs. The MFI increases with the peroxide level.

Temperature range: 200 to 250°C
Dosing: 0,01 to 0,1 phr

Packaging

20kg container
900kg IBC

Bulk delivery of PEROXAN HX-50 W in a 1,25 m³ stainless steel intermediate bulk container (IBC) is possible in a number of countries.

Major decomposition products

Acetone, Ethane, Methane, tert Amyl-alcohol, tert-Butanol

Safety and handling

Please refer to the material safety data sheet (MSDS) for information concerning safe storage, use and handling of PEROXAN HX-50 W. This information should be thoroughly reviewed prior to acceptance of this product. The MSDS is available for downloading at www.pergan.com or through contacting Pergan directly.

The information presented herein is true and accurate and to the best of our knowledge, but without any guarantee. Since the conditions of use are beyond our control we disclaim any liability, including for patent infringement, incurred in connection with the use of these products, data or suggestions.