


PEROXAN DC-80 P

Dialkyl peroxide / Curing

Description

Dicumyl peroxide
80%, Powder with chalk

PEROXAN DC-80 P is used for the curing of unsaturated polyester resins.

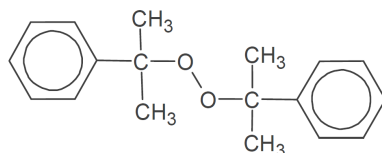

Molecular weight: **270.4**
CAS No.: **80-43-3**

Technical data

Appearance: **white powder**
Peroxide assay: **appx. 80%**
Active oxygen assay: **appx. 4.74%**
Bulk density at 20°C: **520 kg/m³**

Solubility

Insoluble in water, Soluble in aromatic and aliphatic solvents

Storage

Maximum storage temperature (Ts max): **30°C**
Storage stability as from date of delivery: **6 months**

Hazardous reactions

Keep packaging tightly closed in a well ventilated place at indicated storage temperature. Keep away from reducing agents e.g. amines, acids, alkalis, heavy metal compounds (e.g. accelerators, driers, metal soaps). Never weigh out in storage room.

Oxidizing agent. Decomposes violently under the influence of heat or by contact with reducing agent. Never mix with accelerators.

Safety characteristics

Flash point: **>80°C**
SADT: **80°C**

The SADT (Self Accelerating Decomposition Temperature) is the lowest temperature at which a self accelerating decomposition may occur.

PEROXAN DC-80 P

Dialkyl peroxide / Curing

Application

PEROXAN DC-80 P is used for the curing of unsaturated polyester resins at elevated temperatures.

PEROXAN DC-80 P is preferred for the curing of UP resin based hot press moulding formulations in the temperature range from 130° to 170°C. It is specially suitable for GMC; as a solid it ensures good homogenization in the compound.

The stability of this Dialkyl peroxide in an UP resin is hardly influenced by the presence of metal accelerators, pigments or fillers.

Depending on working conditions, the following peroxide dosage level is recommended:

PEROXAN DC-80 P: 1,0 to 2,5 phr

Packaging

25kg cardboard box

Major decomposition products

2-Phenylpropanol-2, acetophenone, Methane

Safety and handling

Please refer to the material safety data sheet (MSDS) for information concerning safe storage, use and handling of PEROXAN DC-80 P. This information should be thoroughly reviewed prior to acceptance of this product. The MSDS is available for downloading at www.pergan.com or through contacting Pergan directly.

The information presented herein is true and accurate and to the best of our knowledge, but without any guarantee. Since the conditions of use are beyond our control we disclaim any liability, including for patent infringement, incurred in connection with the use of these products, data or suggestions.